


# AUDIO TRANSFORMERS

25 and 70.7 Volt Transformers  
for Distributed Audio  
Systems

➤ Very Wide Frequency Response

➤ Up to 100 watts

➤ Manufactured for all KSI Loudspeakers

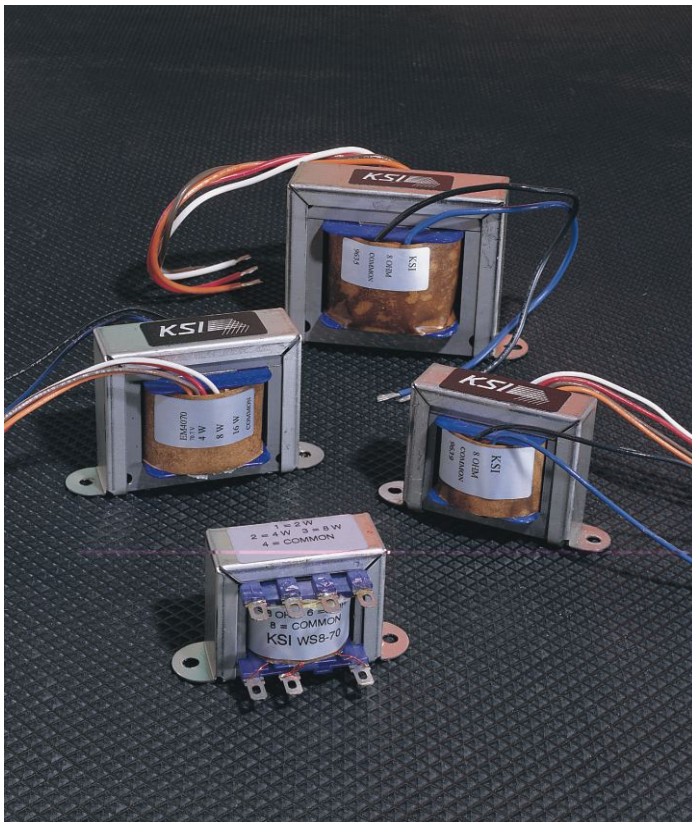

**KSI audio transformers** are designed for use in both 25 and 70.7 volt distributed sound systems. Heavy steel cores assure very low distortion and wide frequency response. This is essential when used with **KSI loudspeakers** as our transformers will not degrade the high performance found in all **KSI loudspeakers**. Compared to small cheap transformers from other manufactures, **KSI transformers** are of consistent and high quality, providing you with top audio performance for all of your distributed sound systems. Our ELT series provides exceptional performance by offering extended low frequency response. The response over the entire range only varies by only 1 db!! **KSI** offers a full selection of sizes for any installation.

## Specifications

25 Volt Line	T25-8	T25-15	T25-30	T25-60	T25-100
	ELT25-8	ELT25-15	ELT25-30	ELT25-60	ELT25-100
70 Volt Line	T70-8	T70-15	T70-30	T70-60	T70-100
	ELT70-8	ELT70-15	ELT70-30	ELT70-60	ELT70-100
Primary Taps Watts	2,4,8	5,10,15	10,20,30	15,30,60	25,50,100
Frequency Response	T series / 50-15000 HZ +/- 3 db ELT series / 30-15000 HZ +/- 1 db				
Insertion Loss	All Transformers .5 db				
Secondary Impedance	All Transformers 4 & 8 ohms taps				



Don't forget to order  
your KSI transformers  
to complete your  
installation!!



**KSI Professional**

3500 Parkdale Ave., Baltimore, MD. 21211 410-383-2167